US005623270A

United States Patent [19]

Kempkes et al.

[11] **Patent Number: 5,623,270**

[45] **Date of Patent: Apr. 22, 1997**

[54] PHASED ARRAY ANTENNA

[75] Inventors: **Michael A. Kempkes**, Westford; **Melvyn I. Wiener**, Lexington, both of Mass.

[73] Assignee: **Riverside Research Institute**, New York, N.Y.

[21] Appl. No.: **321,784**

[22] Filed: **Oct. 12, 1994**

[51] **Int. Cl.**[6] **H01Q 3/22**; H01Q 3/24; H01Q 3/26

[52] **U.S. Cl.** **342/372**; 342/174; 342/442

[58] **Field of Search** 342/372, 174, 342/173, 157, 442

[56] **References Cited**

U.S. PATENT DOCUMENTS


4,931,803	6/1990	Shimko .
4,959,531	9/1990	Marino .
5,109,349	4/1992	Ulich .
5,165,414	11/1992	Larson, III .
5,168,673	12/1992	Nemir .
5,202,776	4/1993	Gesell et al. .

Primary Examiner—Theodore M. Blum
Attorney, Agent, or Firm—Brumbaugh, Graves, Donohue & Raymond

[57] **ABSTRACT**

A phased array antenna system compensates for the effects of antenna flexure, vibration and movement, and thereby negates these effects by introducing an appropriate phase or time delay into the signals being radiated from and received by the discrete antenna elements comprising the phased array antenna. This compensation eliminates the need for massive rigid back structures to maintain antenna rigidity, which thereby simplifies antenna design.

30 Claims, 6 Drawing Sheets

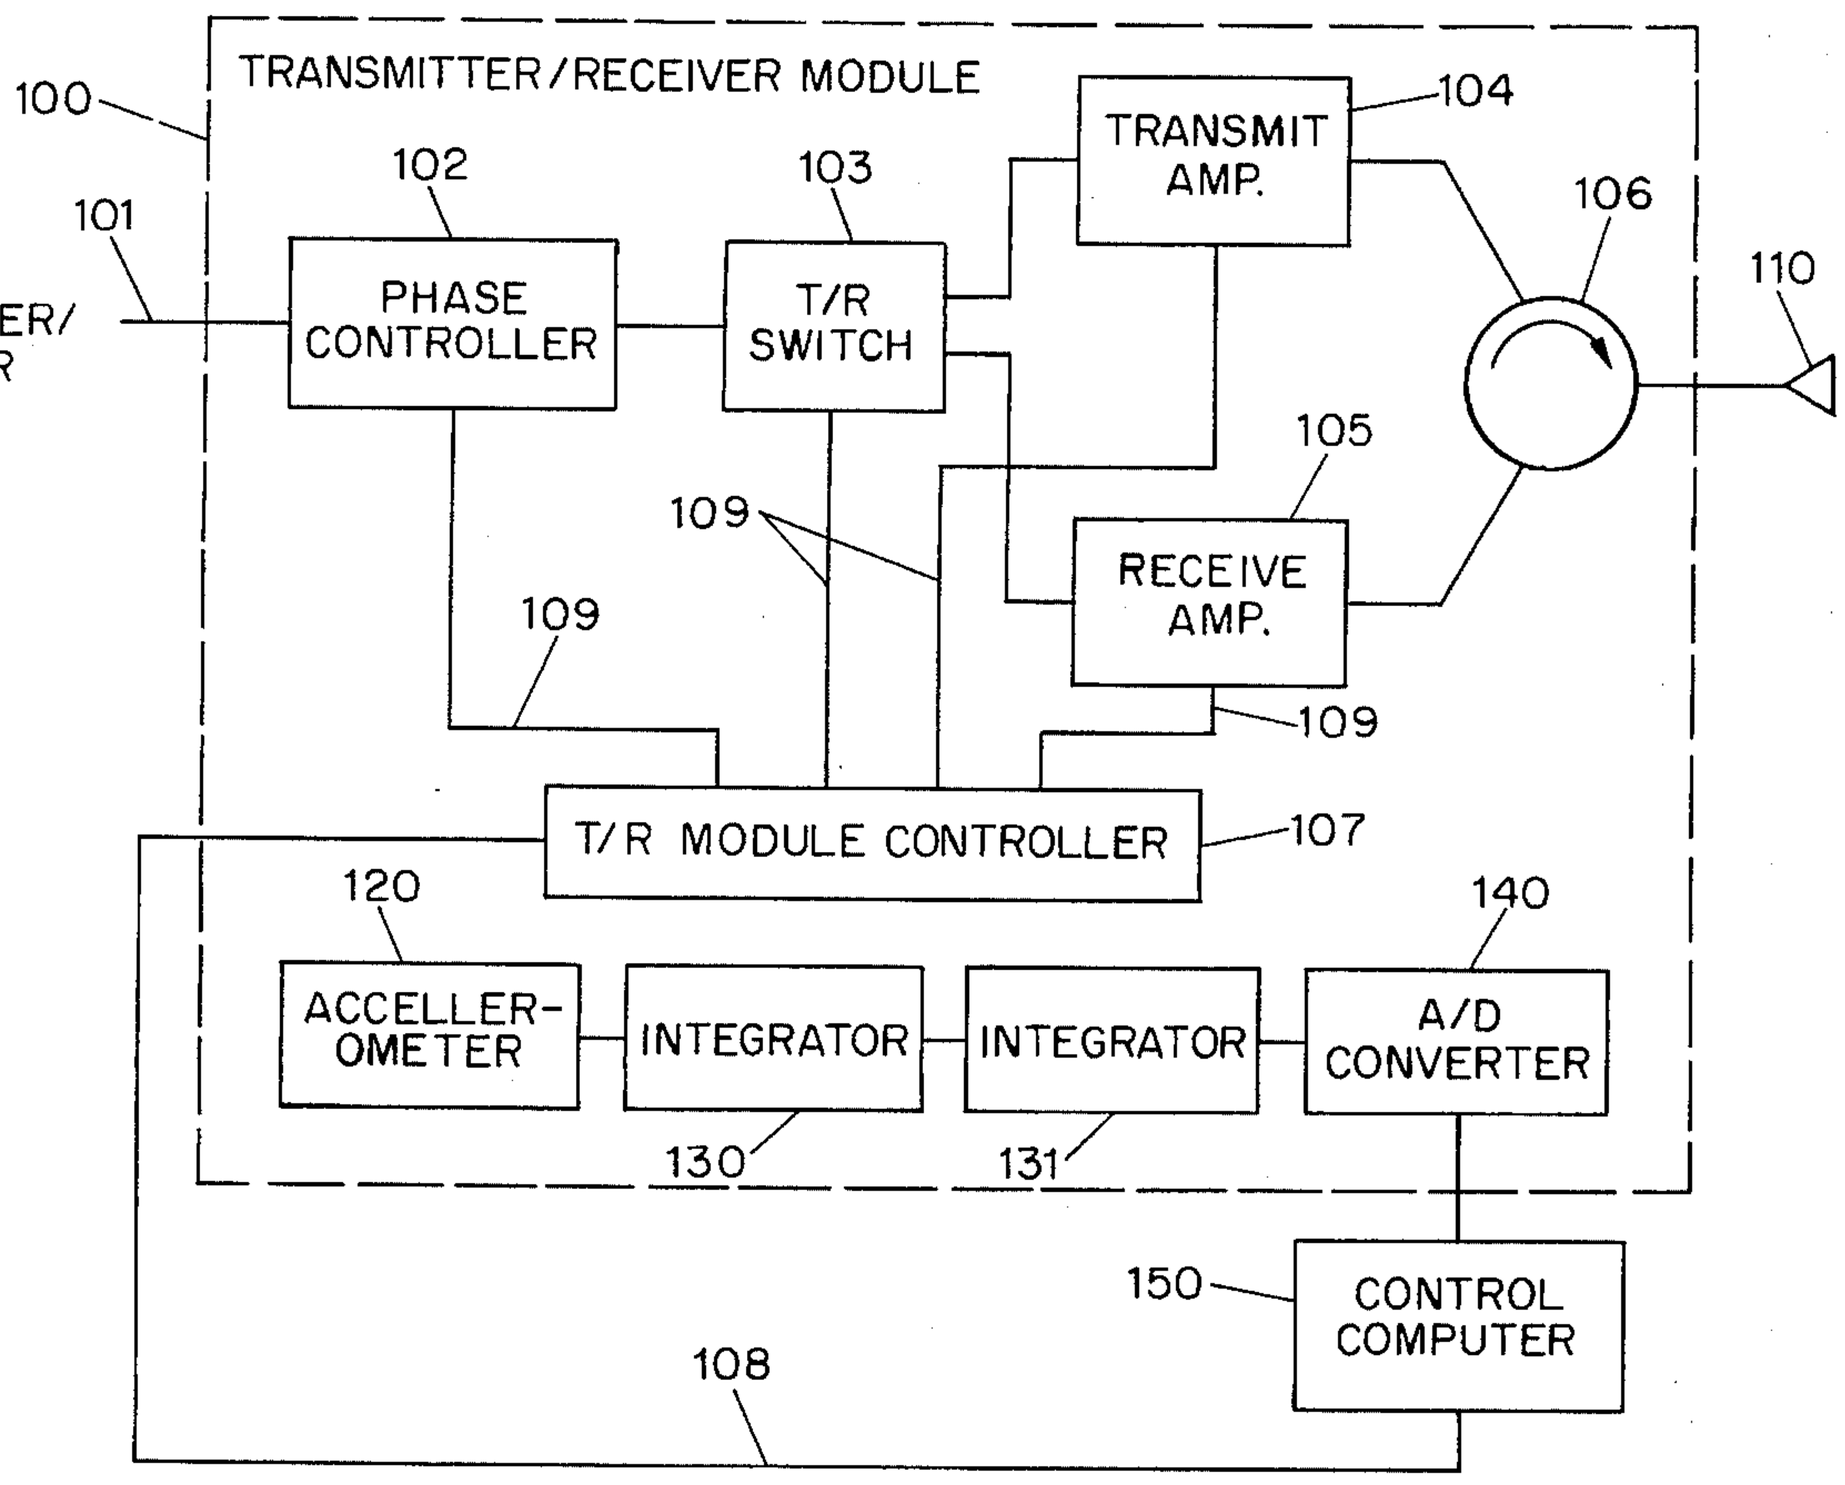

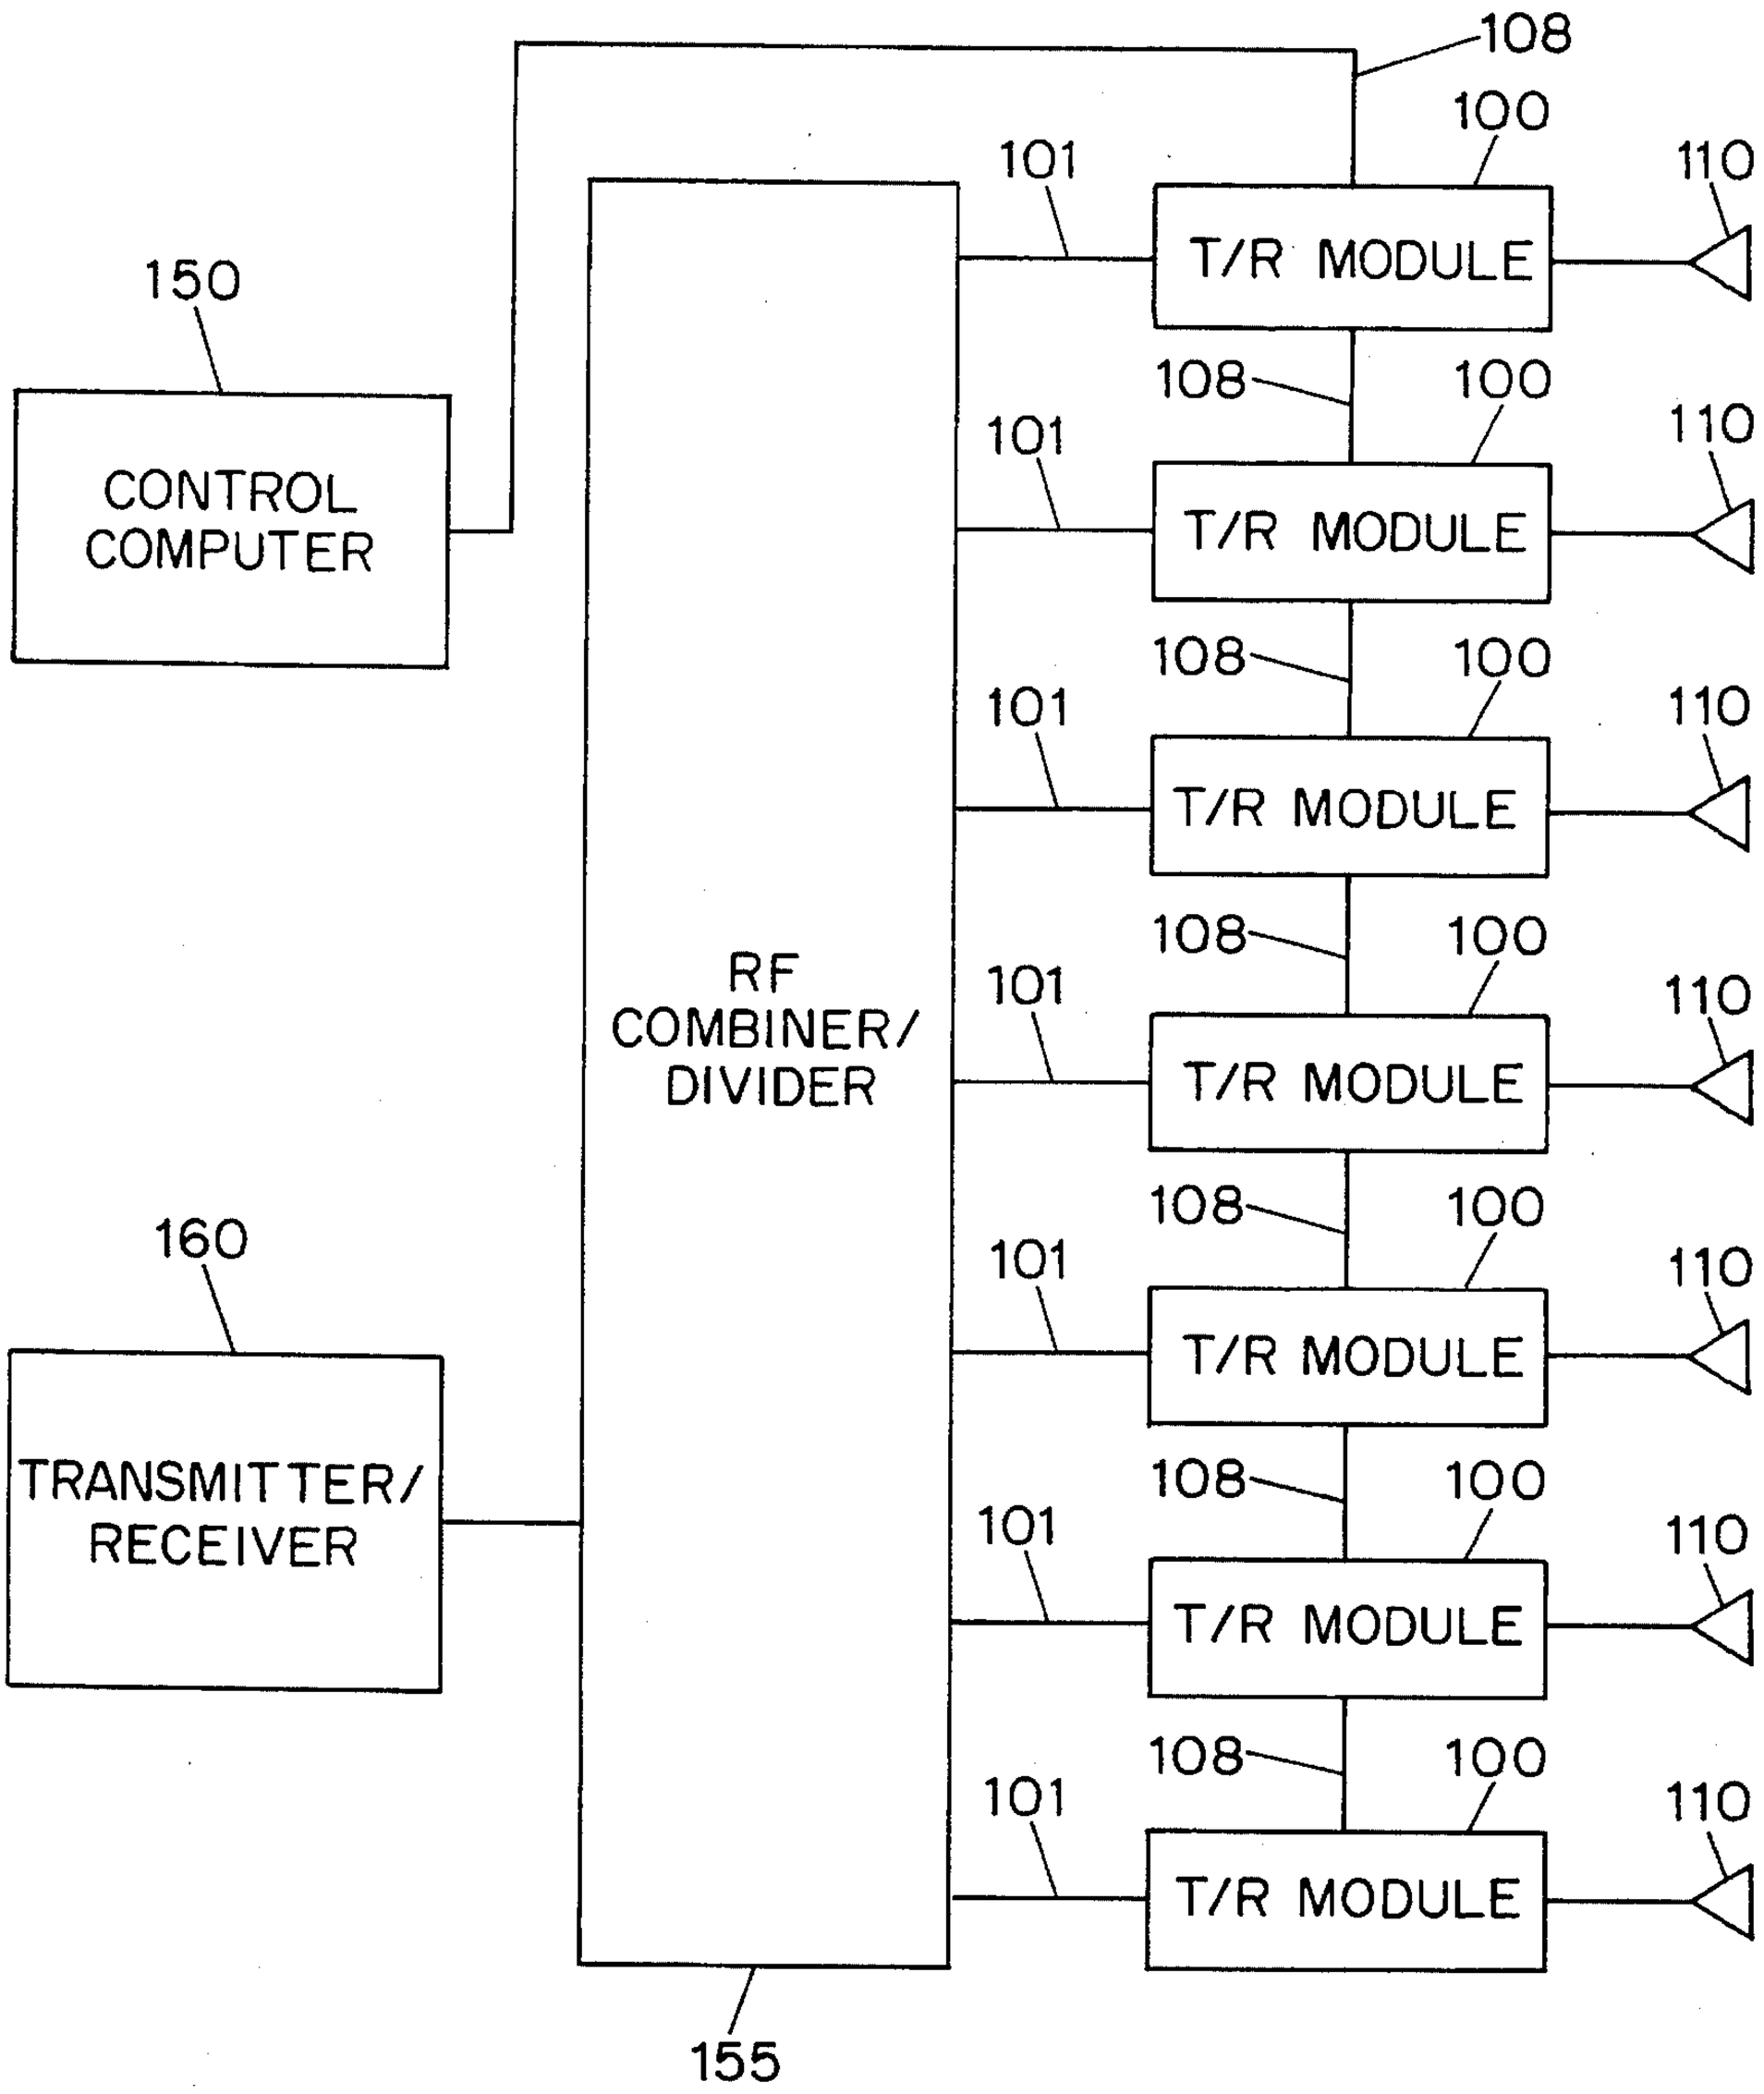

150
CONTROL COMPUTER
160
TRANSMITTER/ RECEIVER
155
RF COMBINER/ DIVIDER
101
108
100
110
T/R MODULE

FIG. 1

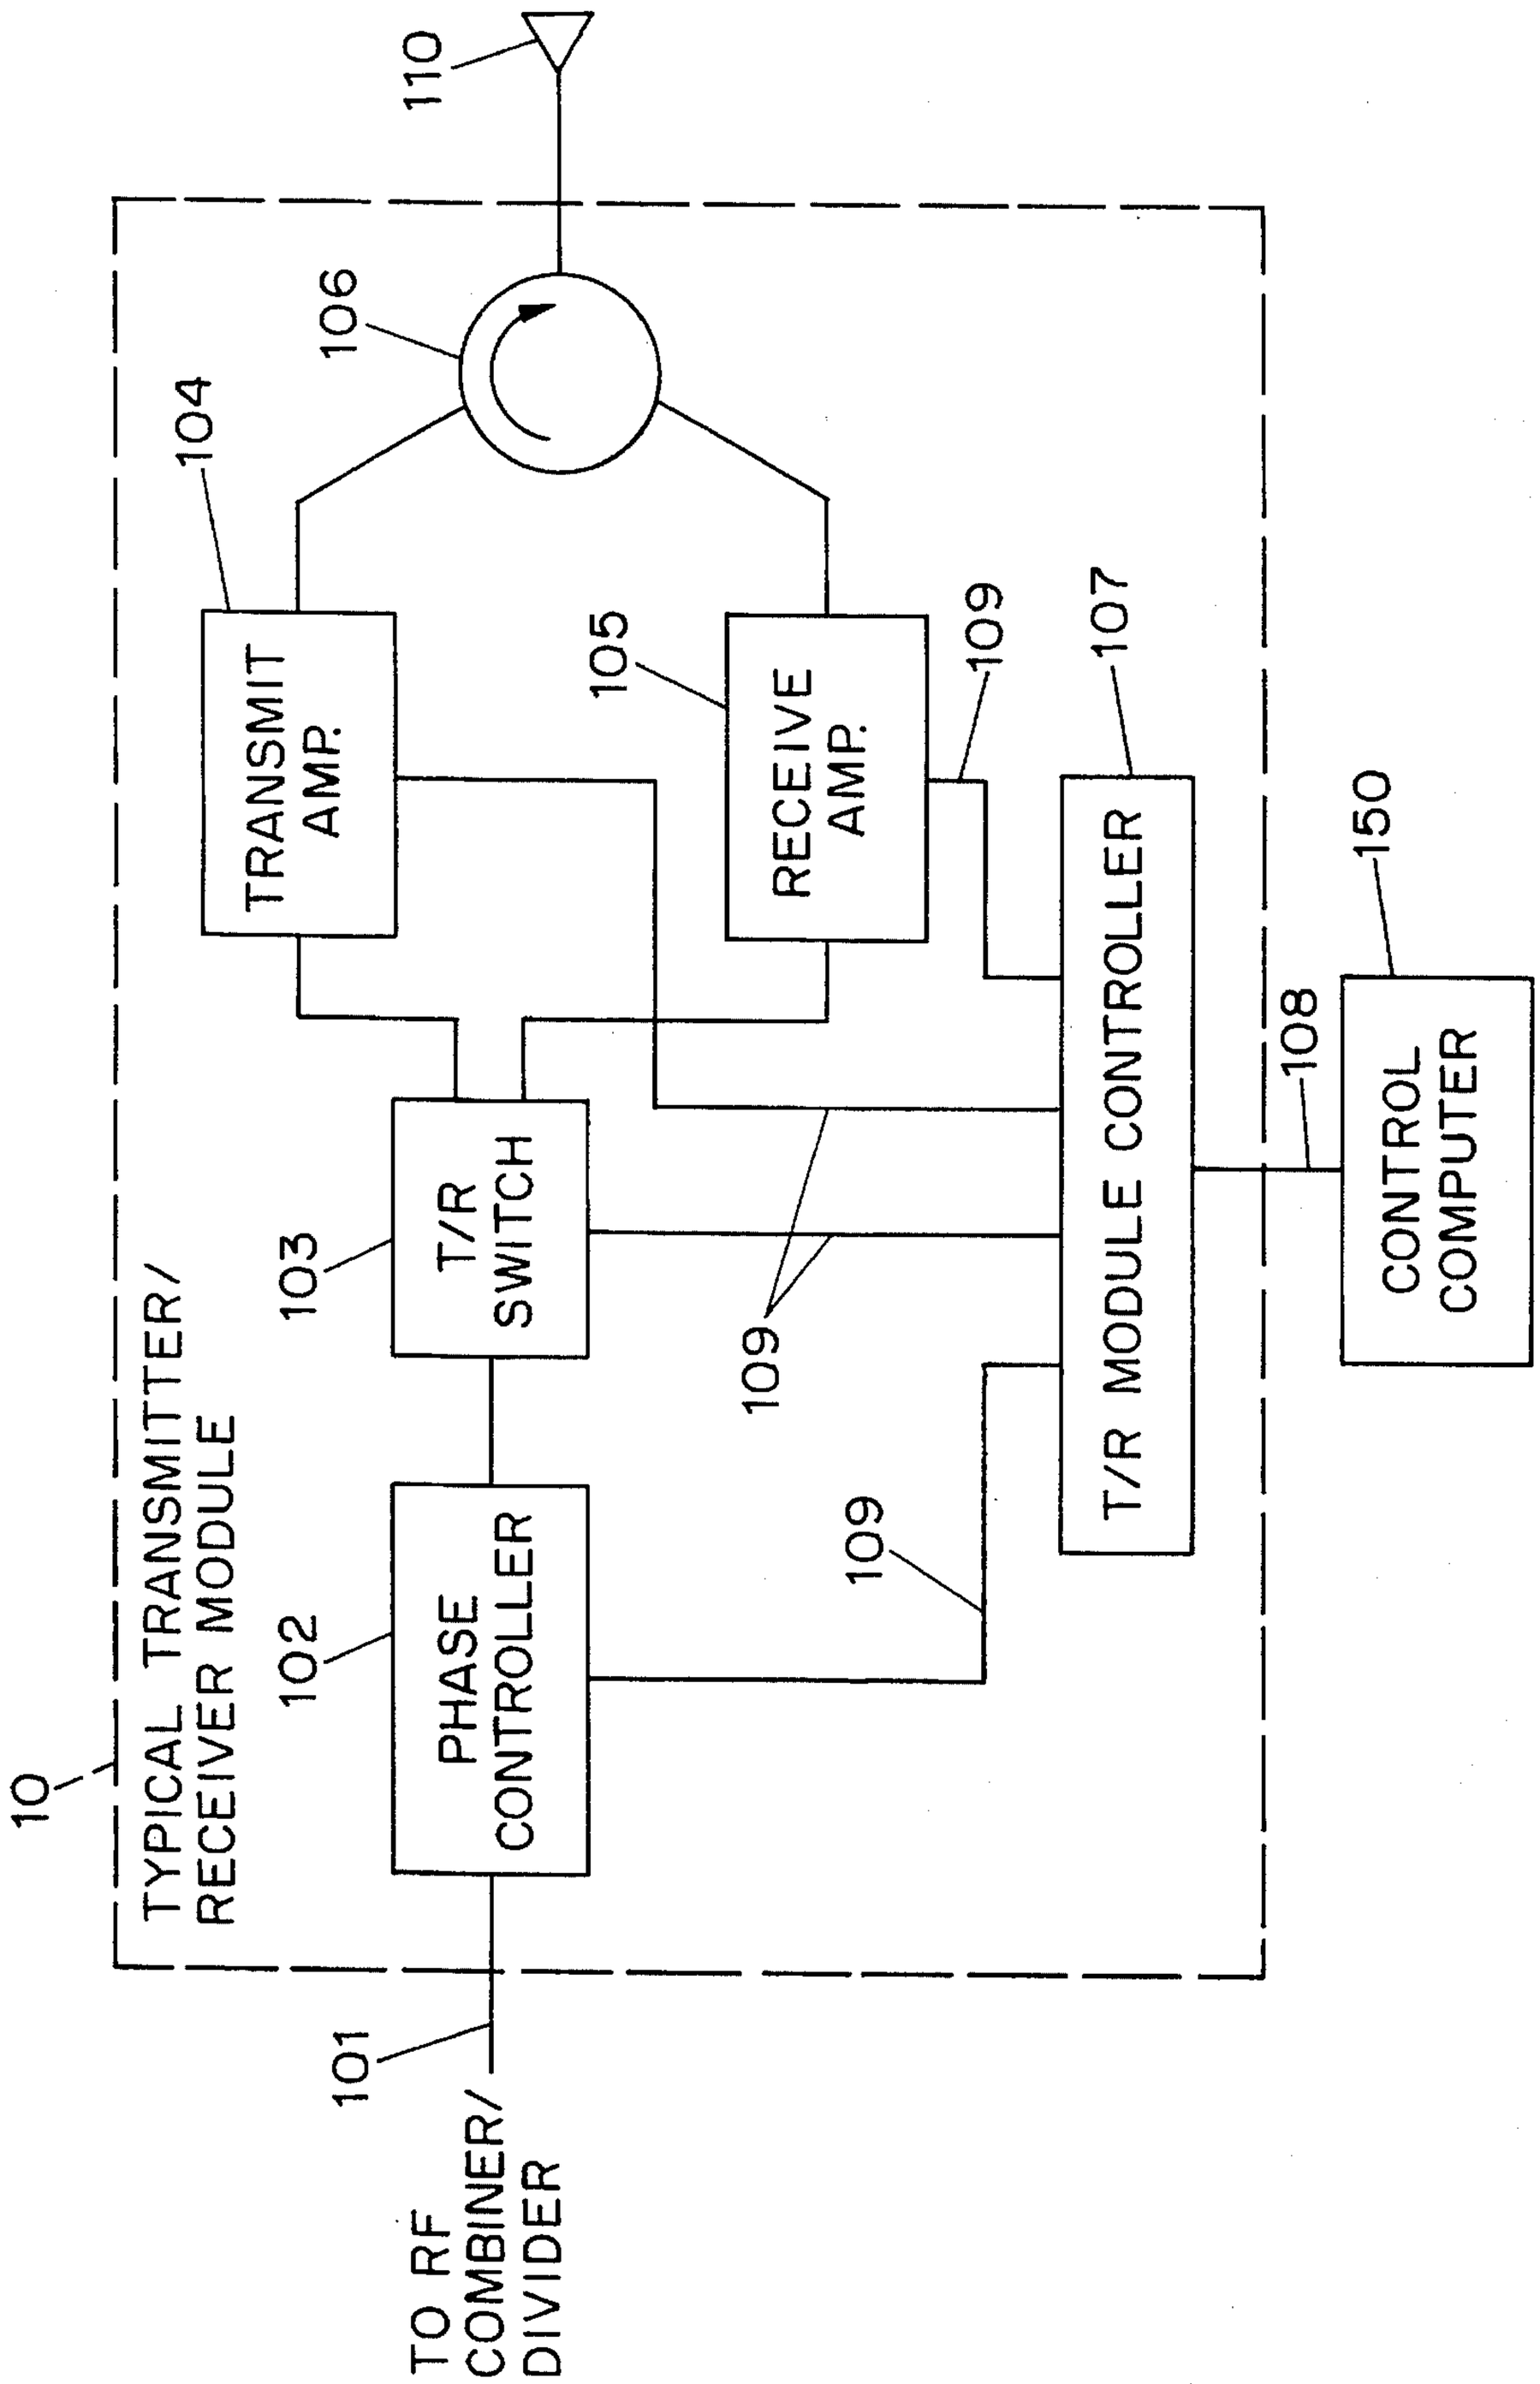


FIG. 2 (PRIOR ART)

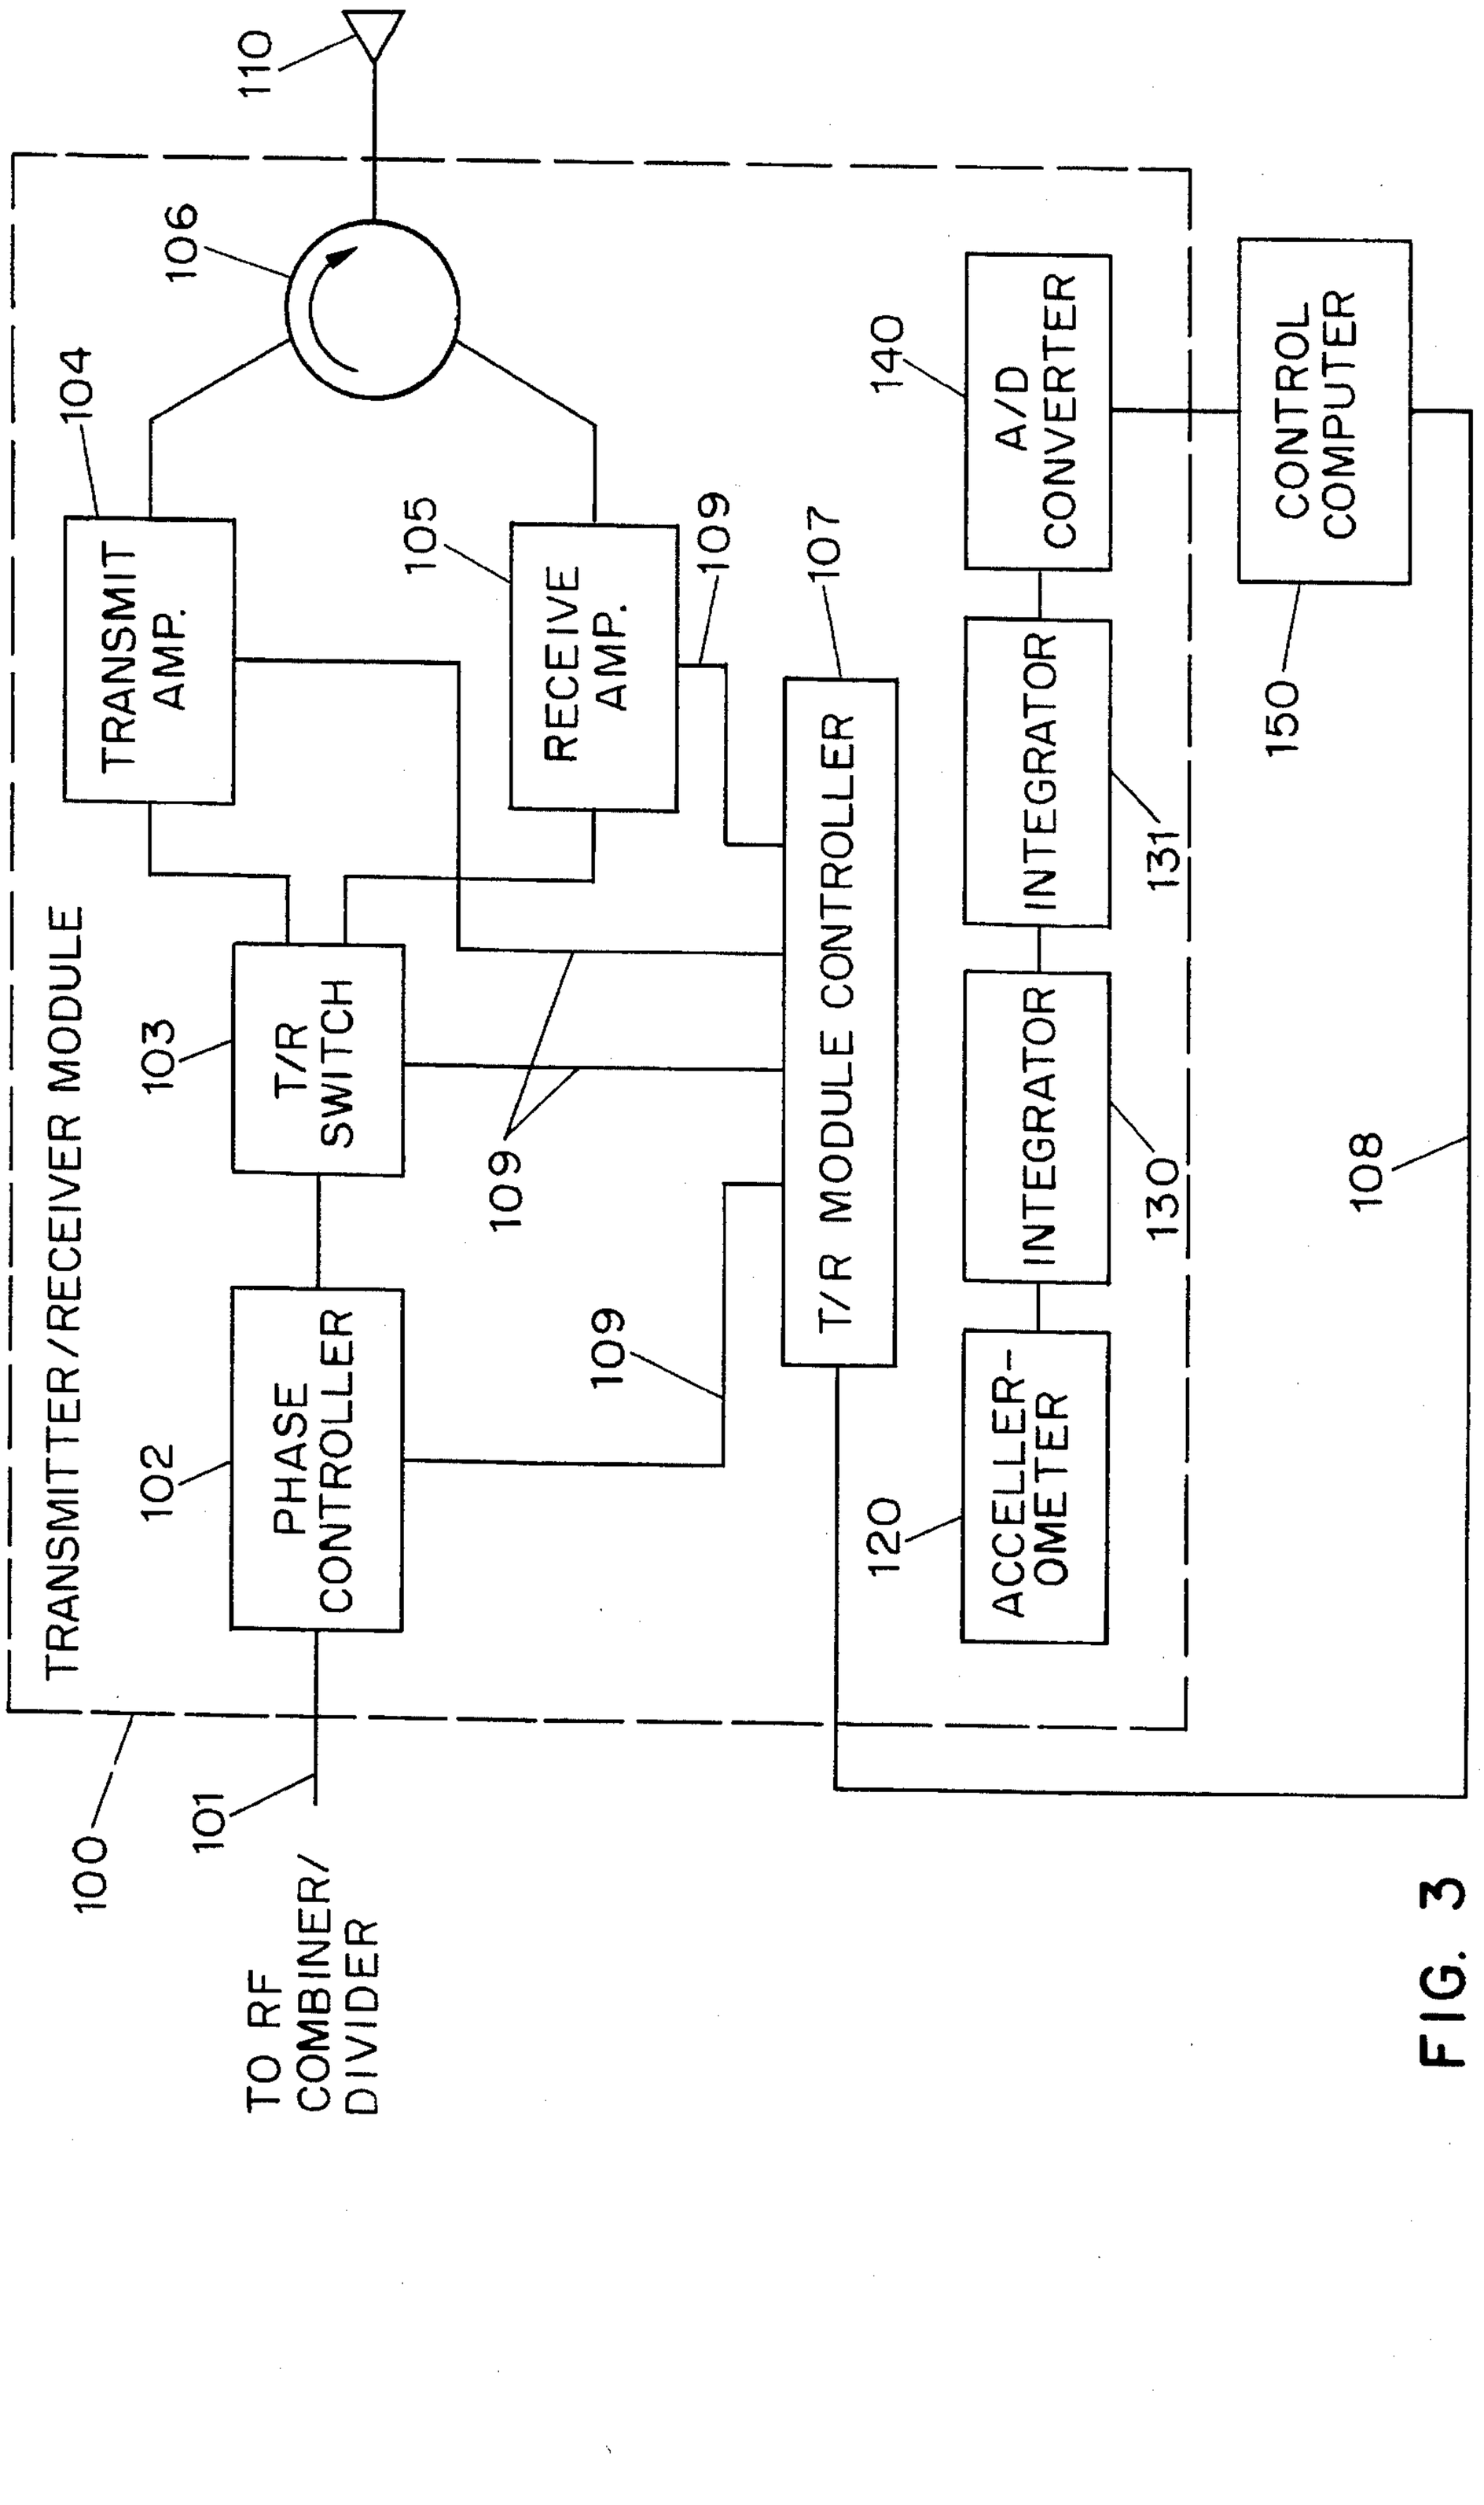

110
106
104
105
109
107
TRANSMIT AMP.
RECEIVE AMP.
CONTROLLER
140
A/D CONVERTER
CONTROL COMPUTER
150
INTEGRATOR
131
INTEGRATOR
130
103
T/R SWITCH
109
109
T/R MODULE CONTROLLER
108
102
PHASE CONTROLLER
109
120
ACCELLER-OMETER
TRANSMITTER/RECEIVER MODULE
100
101
TO RF COMBINER/ DIVIDER

FIG. 3

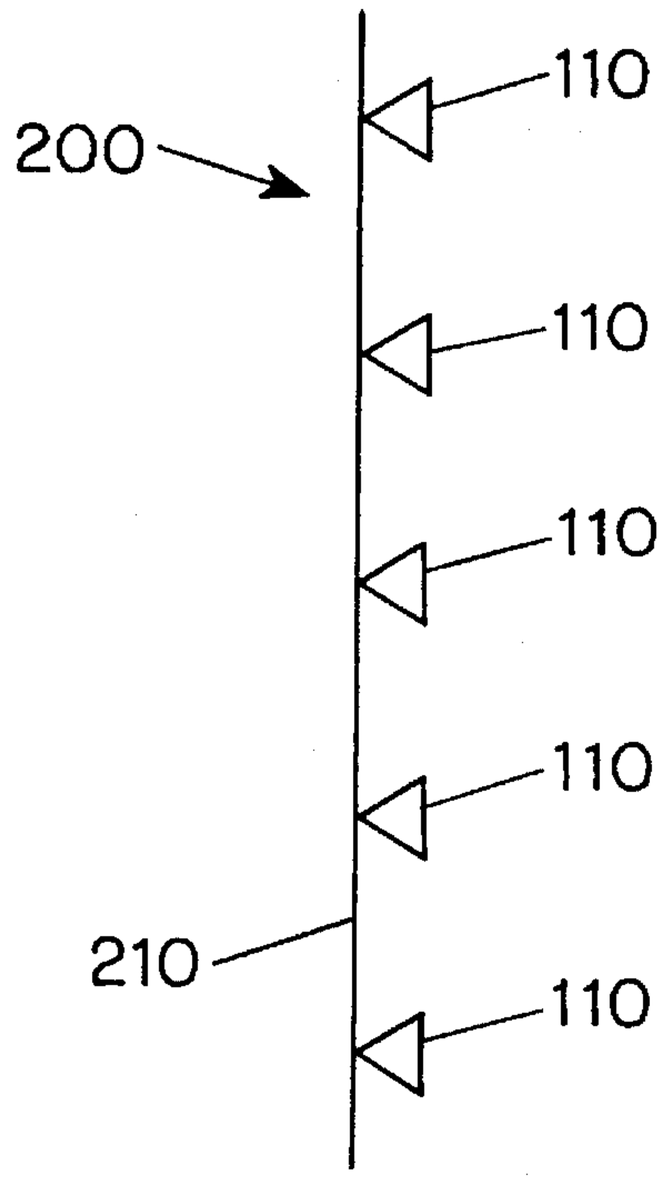


FIG. 4

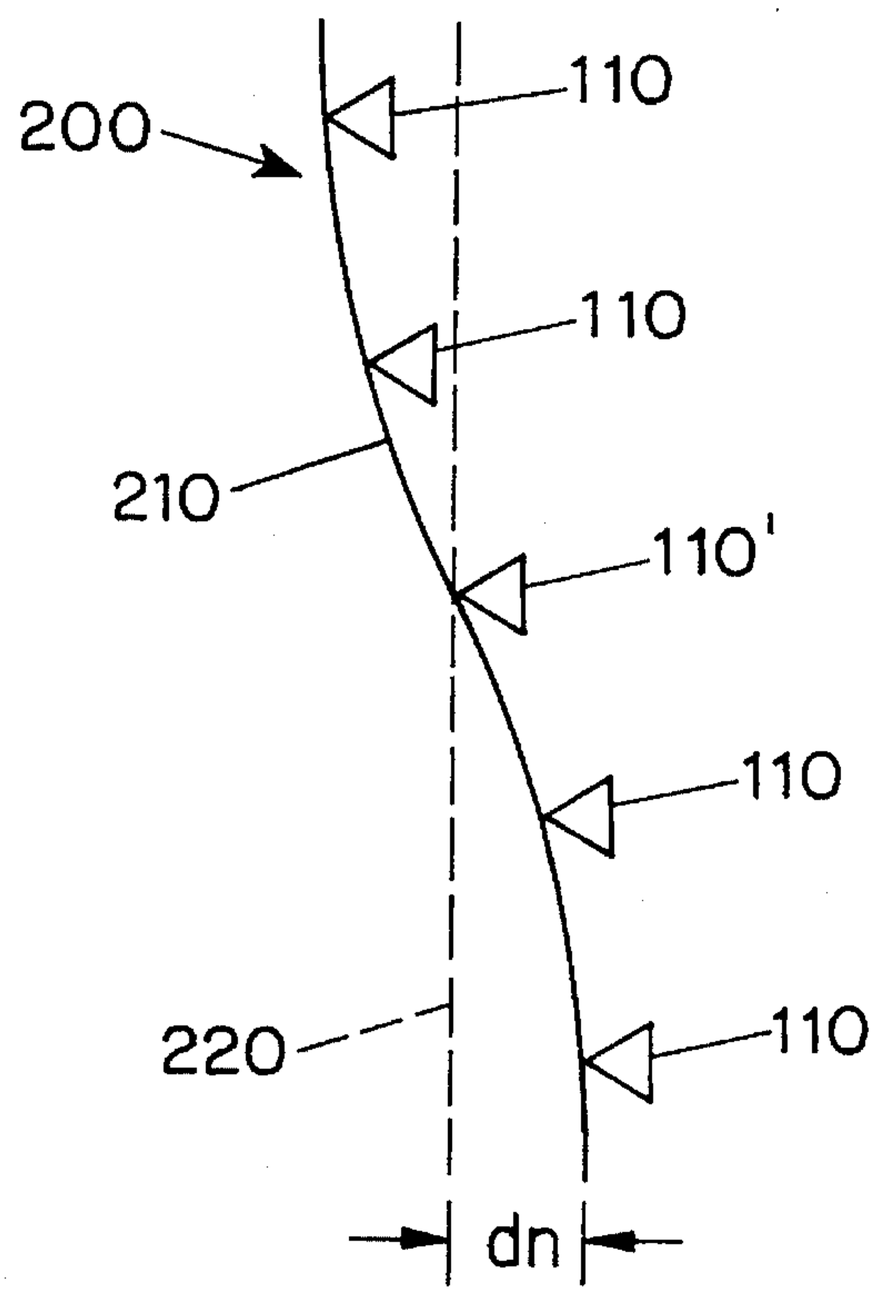


FIG. 5

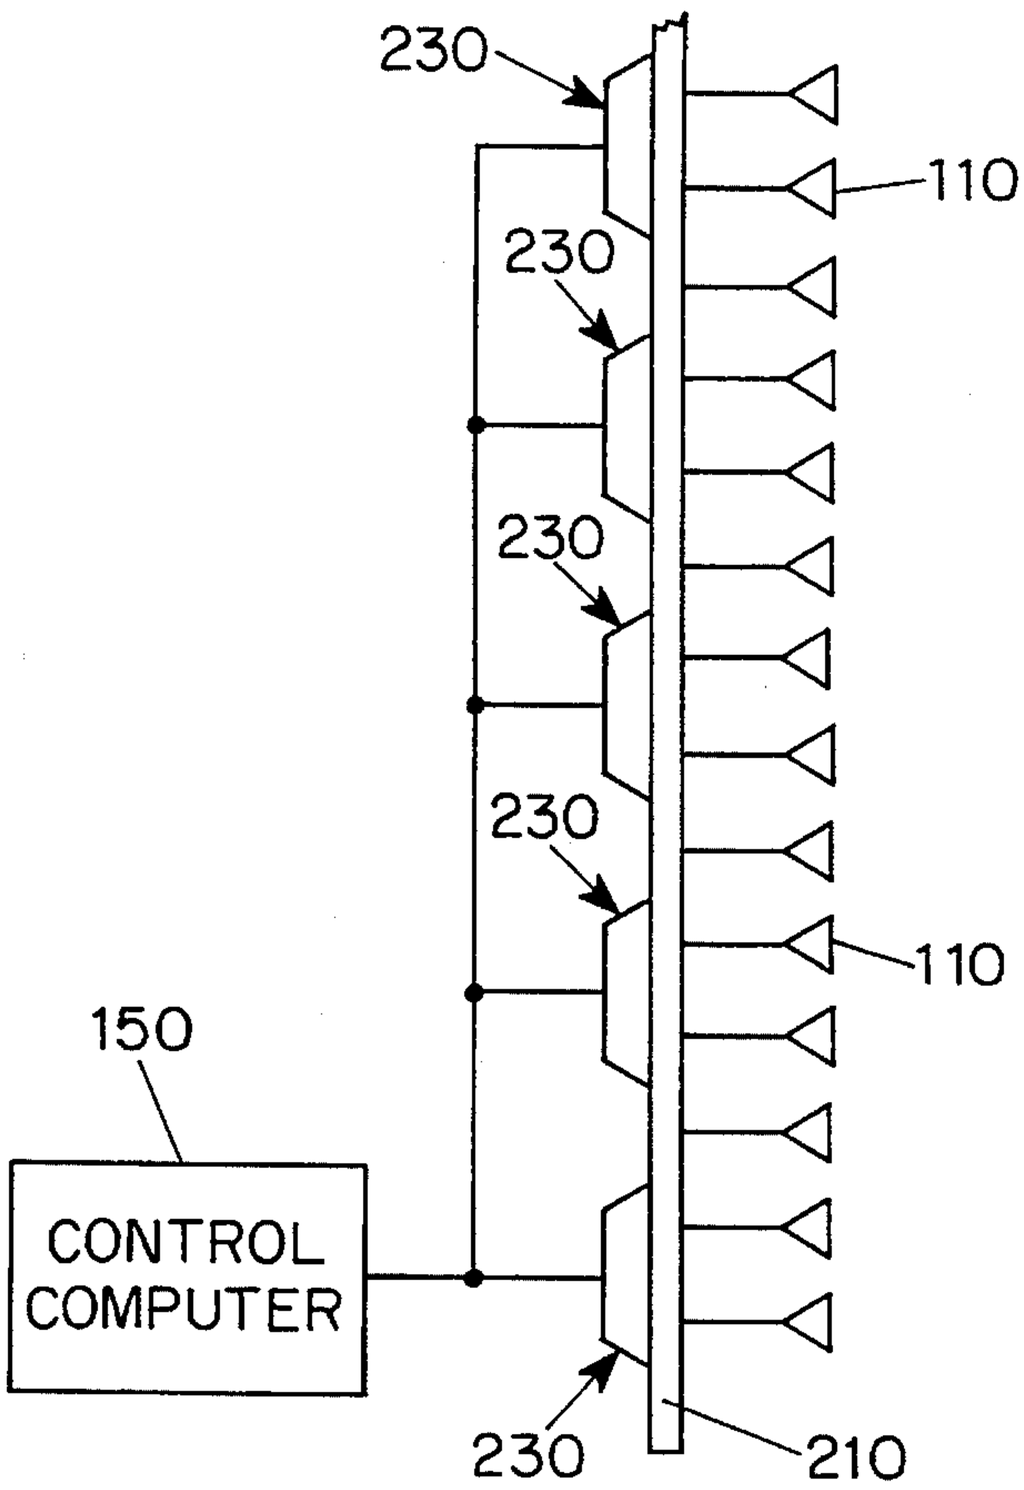


FIG. 6

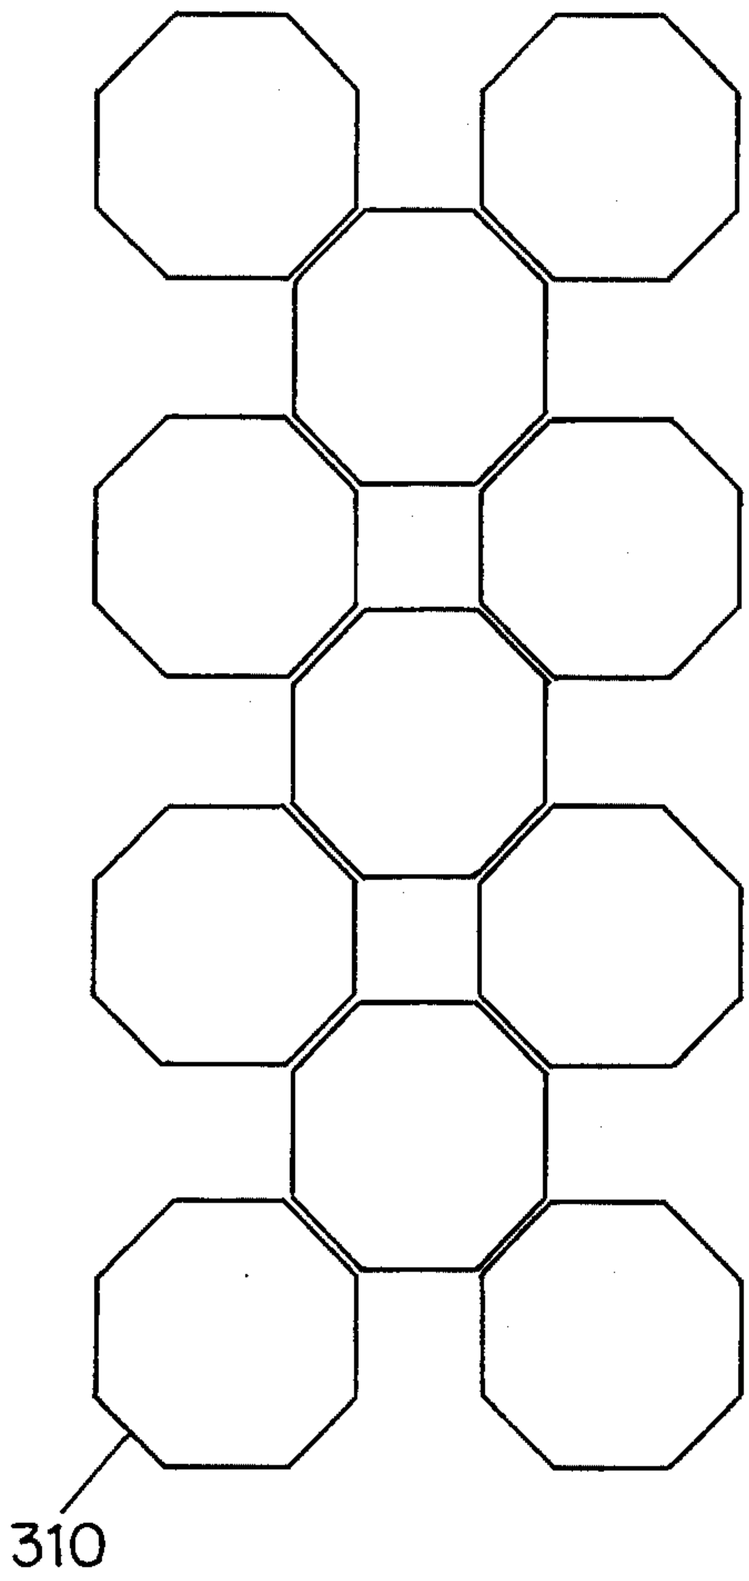


FIG. 7

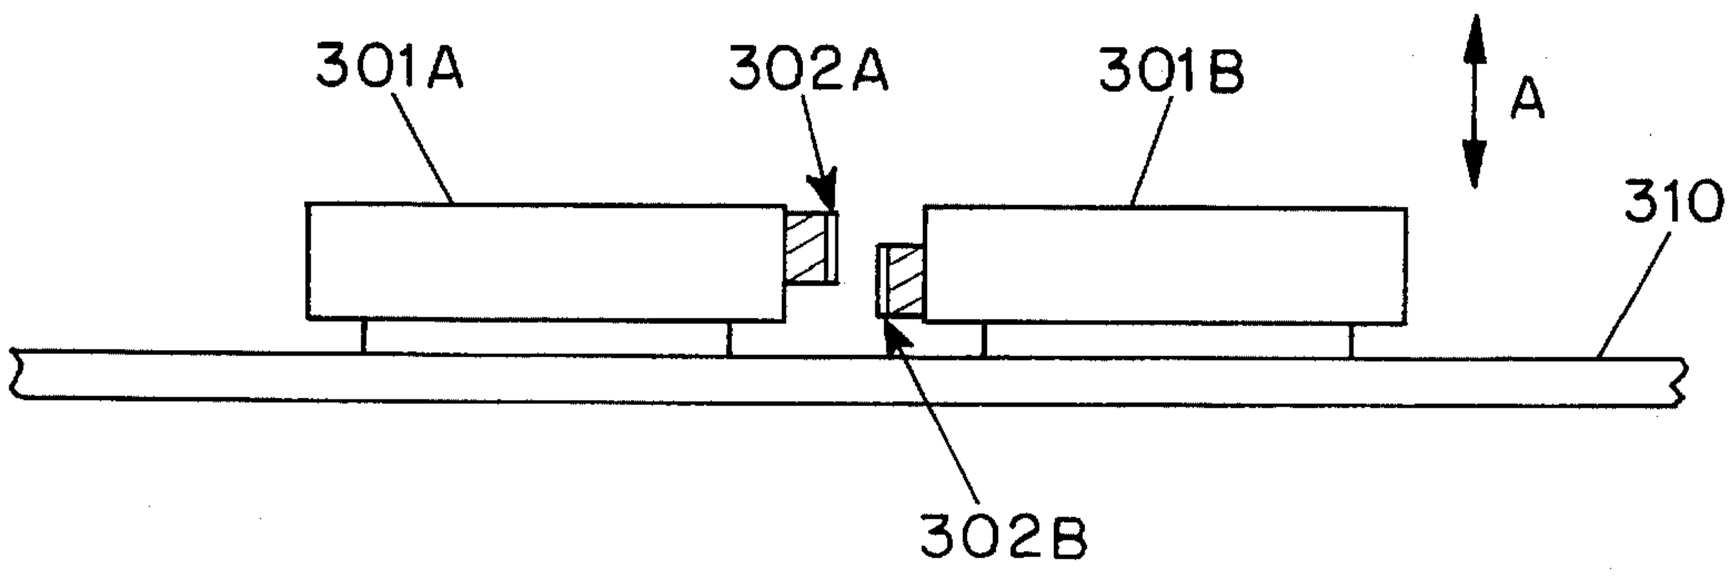


FIG. 8

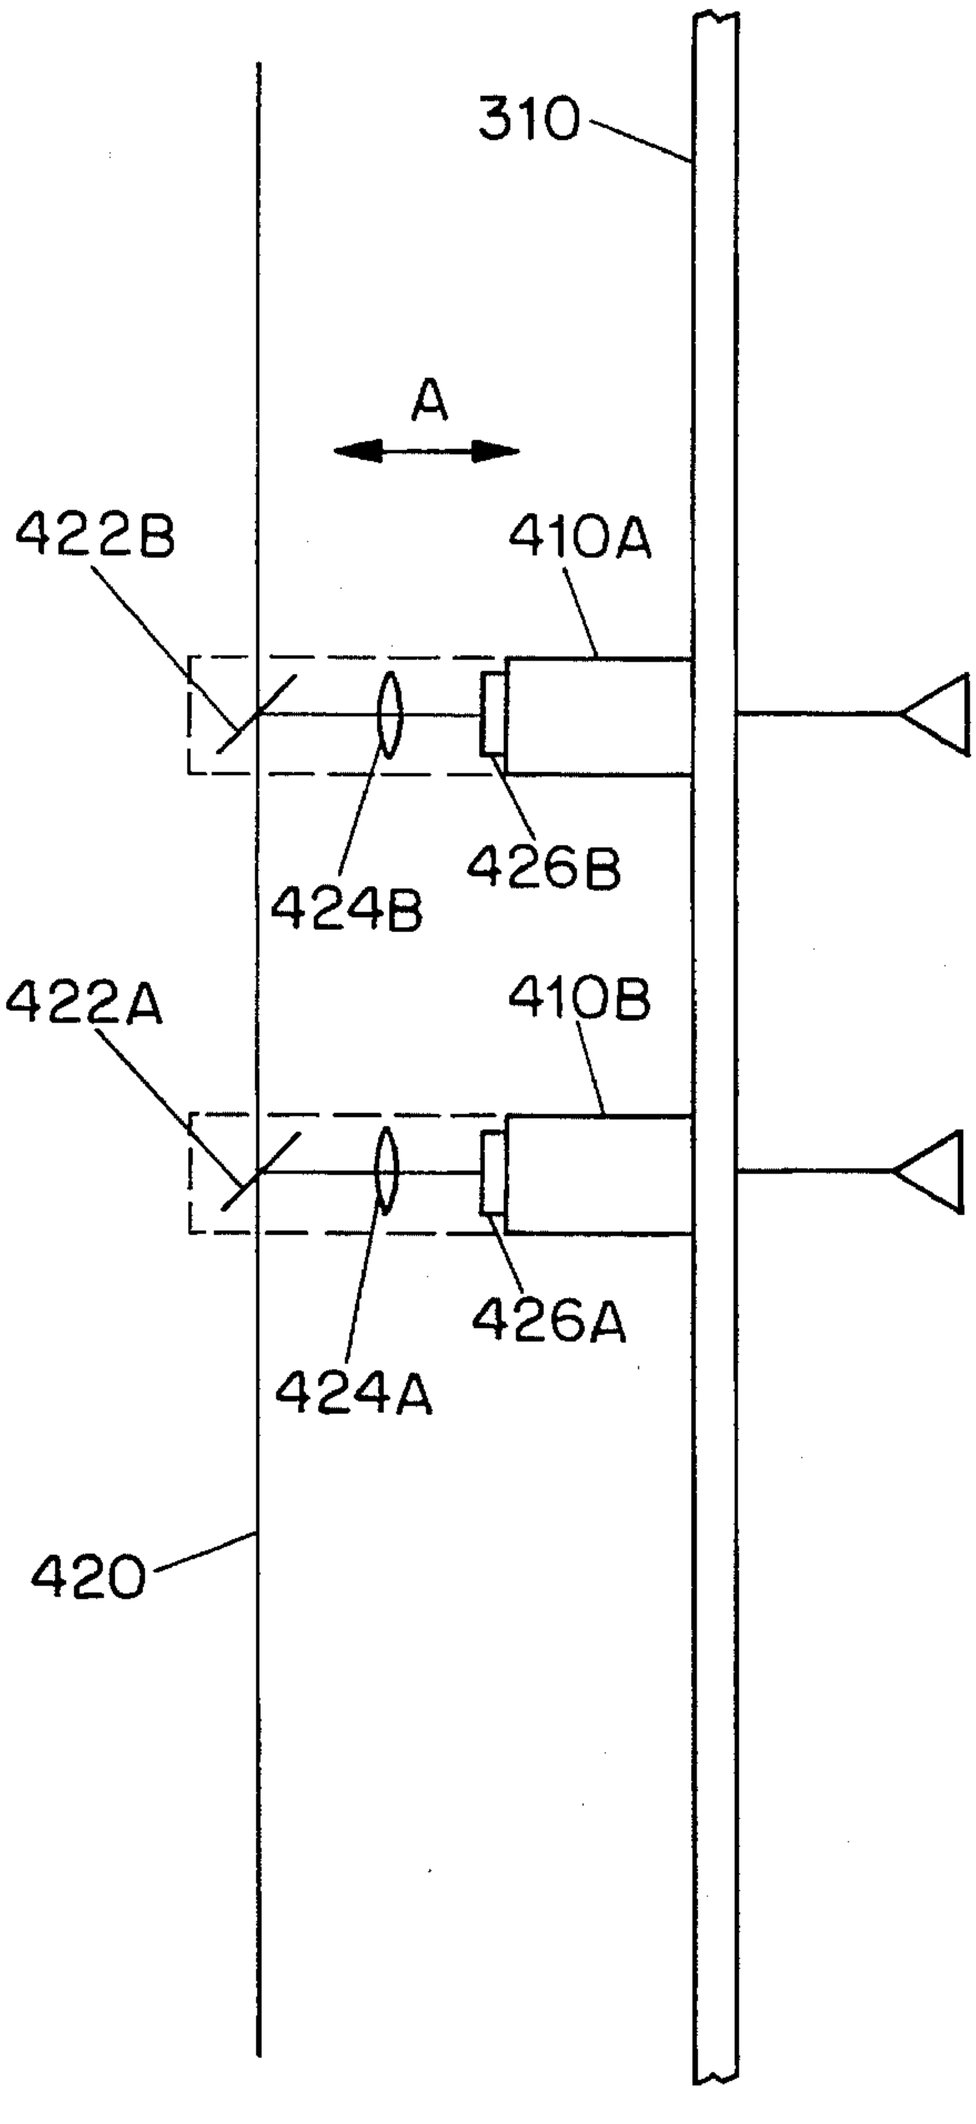

310
A
422B
410A
424B
426B
422A
410B
426A
424A
420

FIG. 9

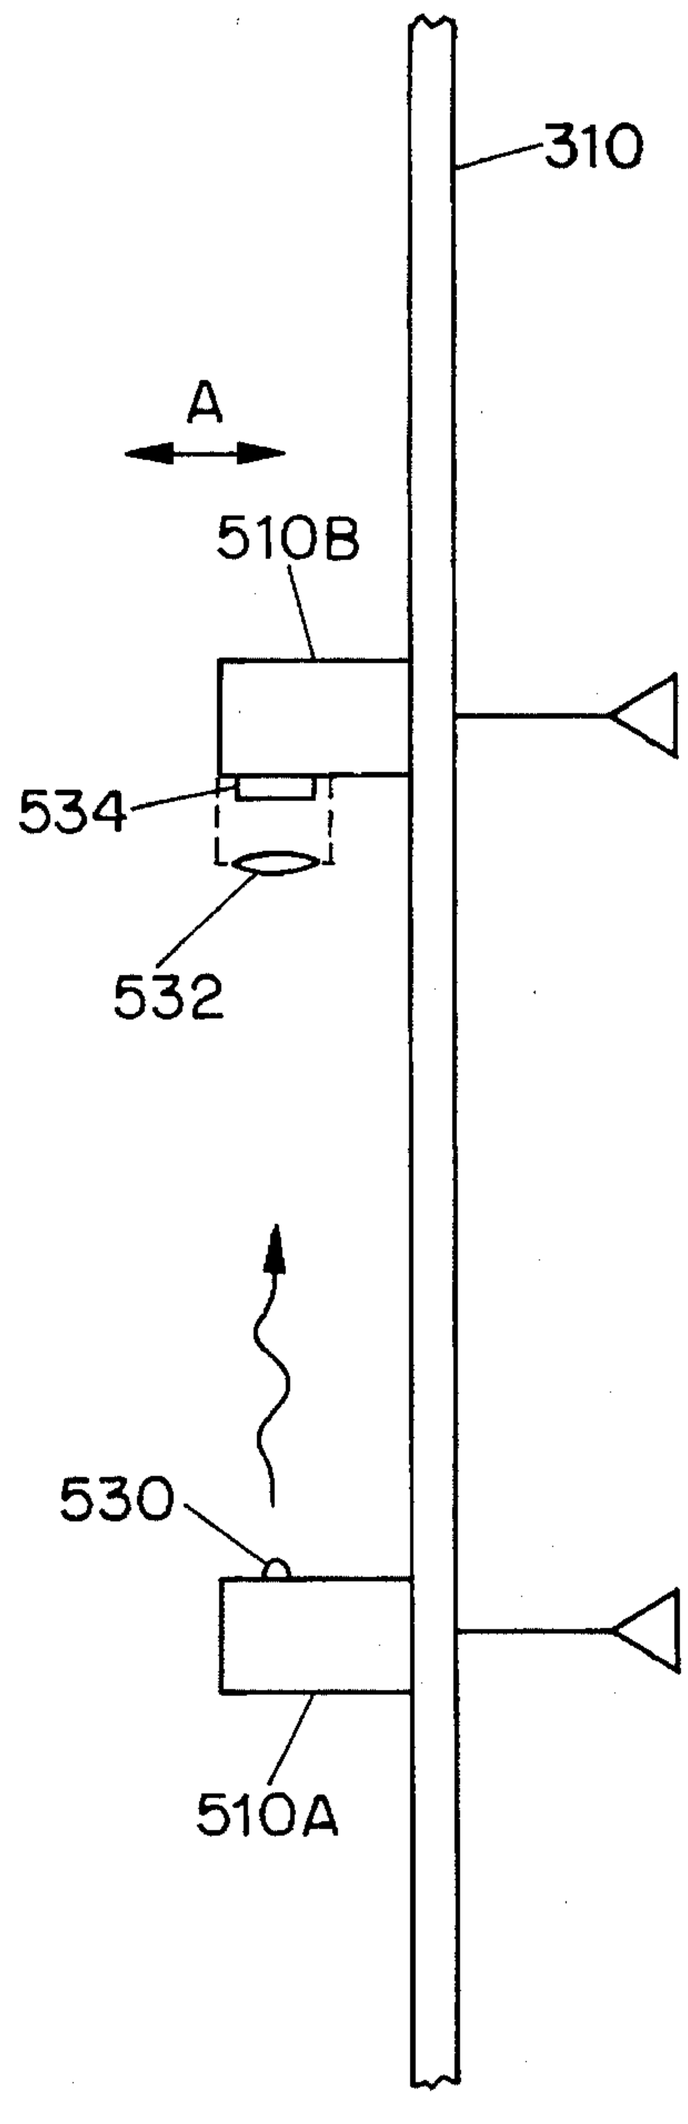

310
A
510B
534
532
530
510A

FIG. 10

PHASED ARRAY ANTENNA

SPECIFICATION

BACKGROUND OF THE INVENTION

The present invention relates to electronically steered phased array antennas and, more particularly, to systems for correcting errors associated with undesirable movement, vibration and flexure thereof.

In electronically steered phased array antennas, the forming and shaping of the radiated and/or received beam is performed by an array of discrete antenna elements in conjunction with phase shifters which insert a specified amount of phase shift into the signal being radiated from and received by each antenna element. The amount of phase shift to be introduced for each discrete antenna element is a function of the desired beam pointing angle and the desired beam shape. Individual phase shift amounts for each phase shifter are calculated by a microcomputer and are communicated to the individual phase shifters.

A state-of-the-art solid state radar transmitter/receiver module (T/R module) combines, on a single integrated circuit board, a phase shifter, a transmit/receive switch (T/R switch), a transmit amplifier, a receive amplifier, and a T/R module controller. An integral antenna element may also reside on or be co-located with the integrated circuit T/R module.

An electronically steered phased array antenna may be constructed with an array of T/R modules and associated antenna elements in which the respective T/R modules are each connected to a data bus which feeds phase delay information to the individual T/R modules.

However, performance of such phased array antennas can be sharply reduced due to unwanted movement, flexure and vibration of the phased array antenna on its platform. This movement, flexure and vibration causes displacement of the antenna elements with respect to one another which in turn causes errors to be introduced into the operation of the antenna array. These errors are particularly pronounced when an antenna array operates at a relatively high microwave frequency such as X-band or higher. Unwanted movement, flexure and vibration causes errors to some degree in all antenna arrays but such errors are most pronounced in antenna arrays having relatively lightweight and flexible back structures, such as where a lightweight antenna array is mounted on an aircraft or other vehicle.

To combat such unwanted movement, flexure and vibration, rigid back structures are presently used to precisely and rigidly support the array of discrete antenna elements and to thereby fix the relative position of each antenna element in order to eliminate flexure across the overall antenna. By rigidly fixing the relative position of each discrete antenna element, the relative position of each antenna element with respect to other elements and with respect to the antenna platform remains constant and need not be compensated for in controlling the phase shift of signals provided to the discrete antenna elements.

However, in modern high resolution radar systems, the antenna flexure tolerances required to maintain acceptable resolution are extremely low. As a result, the back structures required to maintain such low tolerances are quite massive and present numerous design obstacles. For example, these back structures are considerably large and heavy and, in an airborne environment, often require extensive and costly

modifications to the host aircraft in order to accommodate them.

It is therefore an object of the present invention to provide an array antenna system that eliminates the need for these massive rigid back structures and still obtain high resolution in an imaging radar system.

SUMMARY OF THE INVENTION

In accordance with the present invention, there is provided an antenna system having at least one antenna element, a signal generator for providing signals to that antenna element for radiation and/or, a receiver for detecting signals received by that antenna element, and a phase controller for controlling the phase of the radiated and the received signals. The antenna system also includes a position detector located near the antenna element for determining the physical position of the antenna element with respect to a nominal position, a computer for computing a phase delay corresponding to the antenna elements' physical position with respect to that nominal position, and circuitry to operate the phase controller to compensate for the computed phase delay.

In accordance with the invention there is further provided such an antenna system in which at least portions of the signal generator, receiver, phase controller and position detector are arranged together and adjacent to the antenna element.

In accordance with the invention there is further provided such an antenna system in which the position detector is derived from an accelerometer.

In accordance with the invention there is further provided such an antenna system in which compensating for the antenna elements' physical position with respect to the nominal position negates the effects of flexure, vibration and movement on the antenna elements within the antenna system.

In accordance with the invention there is further provided an antenna array having multiple antenna elements for radiating and receiving electromagnetic signals, a signal generator for providing signals to the antenna elements for radiation therefrom, a receiver for detecting signals received by the antenna elements, and a phase controller for controlling the phase of the radiated and received signals. The antenna array also includes at least one position detector located at each antenna element for determining the physical position of the antenna element with respect to a reference antenna element in the antenna array, a computer for computing the deviation of the antenna elements' physical position from a nominal position with respect to the reference antenna element and for computing a phase delay for each position detector, and circuitry to operate the phase controller to compensate for the computed phase delay.

For a better understanding of the present invention, together with other and further objects, reference is made to the following description, taken in conjunction with the accompanying drawings, and its scope will be pointed out in the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. **1** is a block diagram of an array antenna system in accordance with the present invention.

FIG. **2** is a block diagram of a conventionally designed transmitter/receiver module found in the prior art.

FIG. **3** is a block diagram of a transmitter/receiver module for an array antenna system in accordance with the present invention.

FIG. **4** illustrates a linear antenna array.

FIG. **5** illustrates a linear antenna array in a state of flexure, vibration and/or movement.

FIGS. **6–10** illustrate various antenna arrays.

DESCRIPTION OF THE PREFERRED EMBODIMENT

FIG. **1** depicts a block diagram of an electronically steered phased array antenna in accordance with the present invention. The antenna array depicted in FIG. **1** comprises a transmitter/receiver **160**, a radio frequency (RF) combiner/divider **155**, transmit/receive modules (T/R modules) **100**, antenna elements **110**, control computer **150**, transmission lines **101** and data bus **108**.

The transmitter/receiver **160** is connected to the RF combiner/divider **155** which in turn is connected via transmission lines **101** to each of the T/R modules **100**. Each T/R module **100** is connected to and has associated with it at least one antenna element **110**. Multiple antenna elements **110** can be configured together to form either a linear antenna array or a planar antenna array.

In a transmitting mode, the transmitter/receiver **160** provides RF signals to be transmitted by the antenna array. These signals are provided to the RF combiner/divider **155** which distributes the signals to the T/R modules **100** which, in turn, provide the signals to the antenna elements **110**. When the transmitter/receiver **160** is acting as a receiver, signals received by antenna elements **110** are provided first to T/R modules **100** and then via transmission lines **101** to the RF combiner/divider **155** and thereafter to the transmitter/receiver **160**.

A typical conventionally designed prior art T/R module **10**, such as that designed by Raytheon and described in the text entitled "Brookner's Aspects of Modern Radar," is depicted in FIG. **2** and comprises an input/output port **101**, a phase controller **102**, a transmit/receive switch (T/R switch) **103**, a transmit amplifier **104**, a receive amplifier **105**, and a three-port circulator **106**. A typical prior art T/R module **10** may additionally include a T/R module controller **107** which is connected via a data bus **108** to control computer **150** and which receives digital signals from control computer **150** and provides driving signals to phase controller **102**, T/R switch **103**, transmit amplifier **104** and receive amplifier **105**.

The phase controller **102**, which may typically be a diode phase shifter, is controlled by control computer **150** in order to properly shape and steer the radiated RF signal being emitted by the phased array antenna. The phase controller **102** may also be used to compensate for differences in the respective RF signal path lengths between the transmitter/receiver **160** and the multiple antenna elements **110**.

The T/R switch **103** alternately connects the phase controller **102** to the transmit amplifier **104** or to the receive amplifier **105**. The circulator **106** is typically a three-port circulator and is conveniently provided between the transmit amplifier **104**, antenna element **110** and the receive amplifier **105**.

As previously discussed, the relative displacement of the antenna elements within an antenna array with respect to one another is not constant when the antenna elements move with respect to one another as a result of flexure or vibration within the antenna array. This relative movement of antenna elements introduces undesirable errors into the operation of the antenna array.

FIG. **3** depicts a preferred embodiment of a transmitter/receiver module **100** according to the present invention. In accordance with this preferred embodiment, the prior art T/R module **10** depicted in FIG. **2** is additionally provided with a position sensing means, preferably in the form of an inertial position sensor, to determine the relative displacement of each T/R module **100** and its associated antenna elements **110** with respect to the position of a reference antenna element within the antenna array. As depicted in FIG. **3**, the present invention may implement the position sensing means with accelerometers **120**, preferably accelerometers of the miniature integrated circuit tunnelling accelerometer type such as that recently developed by the Jet Propulsion Laboratory and described in the Feb. 11, 1994 issue of Aerospace Daily.

The accelerometers **120** sense the movement of each antenna element and its associated T/R module along at least the axis most subject to flexure and vibration. Acceleration information for each antenna element **110** is provided at the output of accelerometer **120** to integrators **130** and **131** which convert the accelerometer output signals into signals representative of velocity and displacement for each antenna element **110**. The output of integrators **130** and **131** is converted by analog-to-digital (A/D) converter **140** into digital signals which are then provided to control computer **150** so that control computer **150** can determine the relative physical position of each antenna element **110** and its associated T/R module **100** with respect to its nominal position relative to the other antenna elements.

The control computer **150** may determine the relative physical position for each antenna element **110** by comparing the physical position signal for each antenna element **110** to the physical position signal for a reference antenna element and by then determining each antenna element's physical displacement from its nominal position in the antenna array with respect to the reference antenna element. The control computer **150** then uses this information to determine, for each antenna element **110**, the amount of phase correction of the RF signal necessary to compensate for the element's displacement caused by antenna vibration and flexure. The control computer **150** implements this phase correction by appropriately configuring the signal which controls the phase controller **102** in the T/R module **100** for that antenna element **110**.

During antenna transmission, this calculated phase correction is added to any other phase correction determined to be necessary for antenna element **110** in order to properly shape and direct the beam of the electronically steered phased array antenna. During antenna reception, the required phase correction is likewise added to any other phase correction determined to be necessary for proper signal reception by antenna element **110**.

It should be noted that the configuration depicted in FIG. **3** is merely one embodiment of the present invention and the present invention could alternatively be configured in numerous other ways. For example, there could exist an accelerometer **120** for each antenna element **110**, as depicted in FIG. **3**, or alternatively, a single accelerometer could be used for a group of antenna elements. Also, the various processing and control components depicted in FIG. **3** could be combined or distributed in a variety of ways. Processing could take place in one or more centralized computers or in multiple distributed processors located at each antenna ele-

ment **110**. The phase correction required for compensation can be added to the phase correction required for beam shaping and steering in the control computer **150**, as depicted in FIG. **3**, or alternatively, could be added thereto by an external adder.

The functionality of control computer **150** can be distributed into multiple controllers or can be combined into a single unit together with the functionality of T/R module controller **107**. In addition, integrators **130** and **131** and A/D converter **140** may or may not be co-located with antenna element **110**. Furthermore, the processing performed by integrators **130** and **131** can be combined into a single integrator or could instead be performed digitally by the control computer **150** or by a separate controller.

FIG. **4** depicts an array **200** of n (where n=5) antenna elements **110** mounted on a common platform **210**. As depicted in FIG. **4**, all n antenna elements **110** of the antenna array **200** are aligned in a linear array as would be the case if the array **200** was mounted on a straight platform **210** and was not subjected to any vibration or flexure. In the antenna array **200** depicted in FIG. **4**, all n antenna elements are in a fixed position with respect to any point on the array platform **210** and with respect to one another. Accordingly, no compensation would be required to correct for movement, vibration or flexure of antenna array **200**.

FIG. **5** depicts the same antenna array **200** comprising platform **210** and n antenna elements **110** as is depicted in FIG. **4**. However, FIG. **5** represents antenna array **200** as it would exist in a state of vibration or flexure during which time the position of antenna elements **110** is not fixed with respect to one another or with respect the array platform **210** or with respect to the nominal line **220** of the platform **210**. In order to maintain satisfactory antenna performance during periods of such vibration or flexure, compensation in the form of phase or time delay correction must be introduced into the microwave signals being radiated from and received by each of the n antenna elements **110**.

By using integrators **130** and **131** to integrate acceleration information from the output signals of each accelerometer **120**, positional information can be determined for each of the n antenna elements **110**. Once the relative positional displacement d_n from the nearest point on the reference line **220** is determined for each antenna element **110**, the amount of phase correction required to compensate for that antenna element's relative positional displacement d_n at that instant in time can be calculated by the equation:

$$\phi_c = \frac{2\pi d_n}{\lambda}$$

where $\emptyset_c$ is the phase shift, measured in radians, required to compensate for antenna element n's relative positional displacement d_n from the closest point on the reference line **220**, d_n is antenna element n's relative positional displacement from the closest point on the reference plane **220**, and λ is the wavelength of the microwave signal being radiated from or received by antenna element **110**. Control computer **150** can calculate relative positional displacement d_n for antenna element n by determining the difference between the position for antenna element n and the position for a reference antenna element, such as element **110'**. This process can be repeated by control computer **150** for each antenna element n in order to determine the relative positional displacement d_n for each antenna element **110**.

Those skilled in the art will recognize that in accordance with the present invention it is possible to measure displacement of antenna elements or groups of antenna elements by other techniques than the eccelorometer described with respect to FIG. **3**. FIG. **6** shows an alternate embodiment wherein an array of antenna elements **110** is mounted on a supporting structure **210**. The supporting structure is provided with strain gages **230** which individually measure the localized deflection of supporting structure **210**. The localized strain of each of strain gages **230** is provided to control computer **150** which can extrapolate the overall deflection of supporting structure **210** and accordingly the variation from nominal position for individual antenna elements **110**.

FIG. **7** shows another alternate embodiment consisting of an array arranged in modules **301**, each of which may include a group of antenna elements. As shown in the FIG. **8** cross sectional view, modules **301** are mounted to a supporting structure **310** which may experience flexing. To measure the relative movement between modules **301** they are each provided with one-half of a capacitive element for measuring displacement. Thus as shown in FIG. **8**, module **301***a* includes capacitor plate **302**A and module **30**1B is provided with an adjoining capacitor plate **302**B. Displacement of antenna modules **301**A and **301**B in the direction of arrow A can be determined by measuring the capacitance between capacitor plates **302**A and **302**B. Thus, if module **301**B moves upward with respect to module **301**A capacitance between plates **302**A and **302**B is increased by reason of increasing capacitor plate overlap. If element group **301**B is moved in the opposite direction, capacitance decreases.

FIGS. **9** and **10** show alternate embodiments wherein the displacement of antenna elements by flexing of a supporting structure **310** is measured by optical techniques. In accordance with the embodiment of FIG. **9**, a laser beam **420** is projected across elements and intercepted by partial reflecting mirrors **422**A and **422**B associated respectively with element modules **410**A and **410**B. The deflected laser light is focused by lenses **424**A and **424**B onto corresponding charge coupled device (CCD) detectors **426**A and **426**B. In the event of deflection of support structure **310**, the position where laser **420** intercepts the respective partially reflecting mirrors **422** will change, and the position of laser detection on CCD detectors **426** will correspondingly change, to thereby detect the amount of movement in the relative positions of antenna module **410**A and **410**B in the direction of arrow A. In the embodiment of FIG. **10**, element module **510**A is provided with an LED emitter **530**. A lens **532** on element module **510**B projects the light from LED **530** onto CCD detector **534**. In the event that supporting structure **310** bends, the position of the imaged LED light on CCD detector **534** will change, resulting in a detection of the corresponding displacement.

Although the foregoing discussion describes a preferred embodiment of the present invention to compensate for antenna array movement, vibration and flexure in only one dimension corresponding to a linear array, the present invention may be readily extended to compensate for movement, vibration and flexure in multiple dimensions in, for example, a planar or conformal array.

While there has been described what is believed to be a preferred embodiment of the invention, those skilled in the art will recognize that modifications may be made thereto without departing from the spirit of the invention and it is intended to claim all such modifications as fall within the scope of the invention.

We claim:

1. In an antenna system having a plurality of antenna elements, each for radiating and receiving electromagnetic signals, said system including means for providing signals to said antenna elements for radiation therefrom, means for

detecting signals received by said antenna elements and means for controlling the phase of said radiated and said received signals, the improvement comprising:

means, including a position detector for determining the relative physical position of at least one of said antenna elements with respect to a nominal relative position for said antenna element in said antenna system;

means for computing a phase correction associated with the difference between said relative physical position and said nominal relative position; and

means for operating said phase control means to compensate for said computed phase correction.

2. The system specified in claim **1** wherein at least portions of said means for providing signals, portions of said means for detecting signals, said phase control means, and said position detector are arranged together and adjacent to said antenna element.

3. The system specified in claim **1** wherein said position detector comprises an accelerometer.

4. The system specified in claim **3** wherein said accelerometer is a tunnelling accelerometer.

5. The system specified in claim **2** wherein said position detector comprises an accelerometer.

6. The system specified in claim **5** wherein said accelerometer is a tunnelling accelerometer.

7. The system specified in claim **1** wherein said position detector comprises an optical position detector.

8. An array antenna system comprising:

a plurality of antenna elements for radiating and receiving electromagnetic signals;

means for providing signals to said antenna elements for radiation therefrom;

means for detecting signals received by said antenna elements;

means for controlling the phase of said radiated and said received signals;

at least one position detector located at one of said antenna elements for determining the physical position of said one antenna element with respect to a reference antenna element in said array antenna;

means for computing the deviation of the position of said one antenna element from a nominal position with respect to said reference element and for computing a phase delay associated with said deviation; and

means for operating said phase control means to compensate for said computed phase delay.

9. The system specified in claim **8** wherein at least each of said means for providing signals, said means for detecting signals, said phase control means, and said position detector are arranged together and adjacent to said antenna element.

10. A phased array antenna comprising:

a plurality of antenna element modules, each module comprising:

an antenna element;

a transmitter circuit coupled to said antenna element;

a receiver circuit coupled to said antenna element;

a phase shifter coupled to said transmitter and to said receiver circuit; and

an accelerometer and integrator circuit;

a signal divider and combining means for providing signals to be transmitted to said modules and for combining signals received by said modules; and

control means for receiving signals from said integrator circuits and computing a value of phase shift for said phase shifter in accordance with said integrator signals and with the desired pointing angle of said phased array, and for providing said phase shift value to said phase shifter.

11. In an antenna system having a plurality of antenna elements, each for receiving electromagnetic signals, said system including means for detecting signals received by said antenna elements and means for controlling the phase of said received signals, the improvement comprising:

means, including a position detector for determining the relative physical position of at least one of said antenna elements with respect to a nominal relative position for said antenna element in said antenna system;

means for computing a phase correction associated with the difference between said relative physical position and said nominal relative position; and

means for operating said phase control means to compensate for said computed phase correction.

12. The system specified in claim **11** wherein at least portions of said means for detecting signals, said phase control means, and said position detector are arranged together and adjacent to said antenna element.

13. The system specified in claim **11** wherein said position detector comprises an accelerometer.

14. The system specified in claim **13** wherein said accelerometer is a tunnelling accelerometer.

15. The system specified in claim **12** wherein said position detector comprises an accelerometer.

16. The system specified in claim **15** wherein said accelerometer is a tunnelling accelerometer.

17. The system specified in claim **11** wherein said position detector comprises an optical position detector.

18. An array antenna system comprising:

a plurality of antenna elements for receiving electromagnetic signals;

means for detecting signals received by said antenna elements;

means for controlling the phase of said received signals;

at least one position detector located at one of said antenna elements for determining the physical position of said one antenna element with respect to a reference antenna element in said array antenna;

means for computing the deviation of the position of said one antenna element from a nominal position with respect to said reference element and for computing a phase delay associated with said deviation; and

means for operating said phase control means to compensate for said computed phase delay.

19. The system specified in claim **18** wherein at least said phase control means, and said position detector are arranged together and adjacent to said antenna element.

20. A phased array antenna comprising:

a plurality of antenna element modules, each module comprising:

an antenna element;

a receiver circuit coupled to said antenna element;

a phase shifter coupled to said receiver circuit; and

an accelerometer and integrator circuit;

a signal combining means for combining signals received by said modules; and

control means for receiving signals from said integrator circuits and computing a value of phase shift for said phase shifter in accordance with said integrator signals and with the desired pointing angle of said phased array, and for providing said phase shift value to said phase shifter.

21. In an antenna system having a plurality of antenna elements, each for radiating electromagnetic signals, said system including means for providing signals to said antenna element for radiation therefrom and means for controlling the phase of said radiated signals, the improvement comprising:

means, including a position detector for determining the relative physical position of at least one of said antenna elements with respect to a nominal relative position for said antenna element in said antenna system;

means for computing a phase correction associated with the difference between said relative physical position and said nominal relative position; and

means for operating said phase control means to compensate for said computed phase correction.

22. The system specified in claim **21** wherein at least portions of said means for detecting signals, said phase control means, and said position detector are arranged together and adjacent to said antenna element.

23. The system specified in claim **21** wherein said position detector comprises an accelerometer.

24. The system specified in claim **23** wherein said accelerometer is a tunnelling accelerometer.

25. The system specified in claim **22** wherein said position detector comprises an accelerometer.

26. The system specified in claim **25** wherein said accelerometer is a tunnelling accelerometer.

27. The system specified in claim **26** wherein said position detector comprises an optical position detector.

28. An array antenna system comprising:

a plurality of antenna elements for radiating electromagnetic signals;

means for providing signals to said antenna elements for radiation therefrom;

means for controlling the phase of said radiated signals;

at least one position detector located at one of said antenna elements for determining the physical position of said one antenna element with respect to a reference antenna element in said array antenna;

means for computing the deviation of the position of said one antenna element from a nominal position with respect to said reference element and for computing a phase delay associated with said deviation; and

means for operating said phase control means to compensate for said computed phase delay.

29. The system specified in claim **28** wherein at least said phase control means, and said position detector are arranged together and adjacent to said antenna element.

30. A phased array antenna comprising:

a plurality of antenna element modules, each module comprising:

an antenna element;

a transmitter circuit coupled to said antenna element;

a phase shifter coupled to said transmitter circuit; and

an accelerometer and integrator circuit;

a signal divider means for providing signals to be transmitted to said modules; and

control means for receiving signals from said integrator circuits and computing a value of phase shift for said phase shifter in accordance with said integrator signals and with the desired pointing angle of said phased array, and for providing said phase shift value to said phase shifter.

* * * * *